

PROGRAM VIEW : 2013 Spring
MY PROGRAM : 2013 Spring

Choose the symposium you want to see :

- | | | |
|---|---|---|
| A Energy conversion applications of atomic layer deposition | B Organic and hybrid interfaces in excitonic solar cells: from fundamental science to applications | C Advanced thermoelectrics: from materials to devices |
| D Advanced inorganic materials and structures for photovoltaics | E Scientific basis of the nuclear fuel cycle | F Nanomaterials for energy conversion and storage |
| G Alternative approaches of SiC and related wide bandgap materials in light emitting and solar cell applications | H Multifunctional binary and complex oxides films and nanostructures for microelectronic applications | I The route to post-Si CMOS devices: from high mobility channels to graphene-like 2D nanosheets |
| J Semiconductor nanostructures towards electronic and optoelectronic device applications - IV | K Physics and technology of advanced extra functionality CMOS-based devices | L Group III nitrides |
| M Basic research on ionic-covalent materials for nuclear applications | N Atomic-scale engineering of multifunctional nano-sized materials and films | O Synthesis, processing and characterization of nanoscale multifunctional oxide films IV |
| P Functional nanowires: synthesis, characterization and applications | Q Bionanomaterials for imaging, sensing and actuating | R Nano-engineered bioactive interfaces |
| S Protective coatings and thin films'13 | T Advances and enhanced functionalities of anion-controlled new inorganic materials | U Design of multifunctional nano-objects for biomedical applications |
| V Laser materials interactions for micro and nano applications | W Ion beam applications: new and innovative approaches | X Advances in the characterization of functional materials under relevant process conditions |
| Y WORKSHOP - Protecting and securing our cultural heritage: diagnostics, characterization, conservation and restoration | | |

European Materials Research Society

23 Rue du Loess - BP 20 - 67037 Strasbourg Cedex 02 - France - Phone:+33-(0)3 88 10 63 72 - Fax:+33-(0)3 88 10 62 93 - emrs@emrs-strasbourg.com

17:45

UNDERSTAND THE IMPORTANCE OF MOLECULAR ORGANIZATION AT POLYMER-POLYMER INTERFACES IN EXCITONIC SOLAR CELLS

Authors : Helena M. G. Correia, Hélder M. C. Barbosa, Luís Marques, Marta M. D. Ramos
Affiliations : Departamento/Centro de Física, Universidade do Minho, Campus de Gualtar, 4710-057 Braga, Portugal

Resume : To improve the efficiency of organic solar cells is necessary, for instance, to increase the open-circuit voltage or increase sun-light absorption by covering complementary regions of the solar spectrum. This can be achieved by using a donor-acceptor system composed of two polymers. The versatility of these materials has the advantage of enabling the control of morphology at nanoscale, and thus the design of an adequate interface to improve the device efficiency, using for instance nanoimprint lithography. However, proper control of the molecular organization of both polymers at polymer-polymer interface is difficult and strongly depends on the experimental conditions used. Polymer chains can present different conformations relative to the interface, creating different conjugated strand arrangements whose disorder degree can affect energy and charge transfer. Thus, understanding this effect is of utmost importance to improve the efficiency of excitonic solar cells. In this work we present a Monte Carlo model that uses a proper description of polymer-polymer interface nanomorphology and considers the main physical processes that mediate excitons and charges dynamics. Our results show that the amount of charge extracted from the interface is sensible to polymer strand orientation and to the presence of the diffusive layer formed by the mixture of both polymers.

PI 5

[add to my program](#)[\(close full abstract\)](#)



UNDERSTAND THE IMPORTANCE OF MOLECULAR ORGANIZATION AT POLYMER-POLYMER INTERFACES IN EXCITONIC SOLAR CELLS



Universidade do Minho
Escola de Ciências
Centro de Física

Helena M. G. Correia, Hélder M. C. Barbosa, Luís Marques e Marta M. D. Ramos
Department/Centre of Physics, University of Minho, Campus de Gualtar 4710-057 Braga, Portugal,
hcorreia@fisica.uminho.pt



SPRING 13: Conference

To improve the efficiency of organic solar cells is necessary, for instance, to increase the open-circuit voltage or increase sun-light absorption by covering complementary regions of the solar spectrum. This can be achieved by using a donor-acceptor system composed of two polymers. The versatility of these materials has the advantage of enabling the control of morphology at nanoscale, and thus the design of an adequate interface to improve the device efficiency, using for instance nanoimprint lithography. However, proper control of the molecular organization of both polymers at polymer-polymer interface is difficult and strongly depends on the experimental conditions used. Thus, understanding this effect is of utmost importance to improve the efficiency of excitonic solar cells

MESOSCOPIC MODEL

Systems Used To Model Different Polymer-Polymer Interfaces

Polymer-Based SC

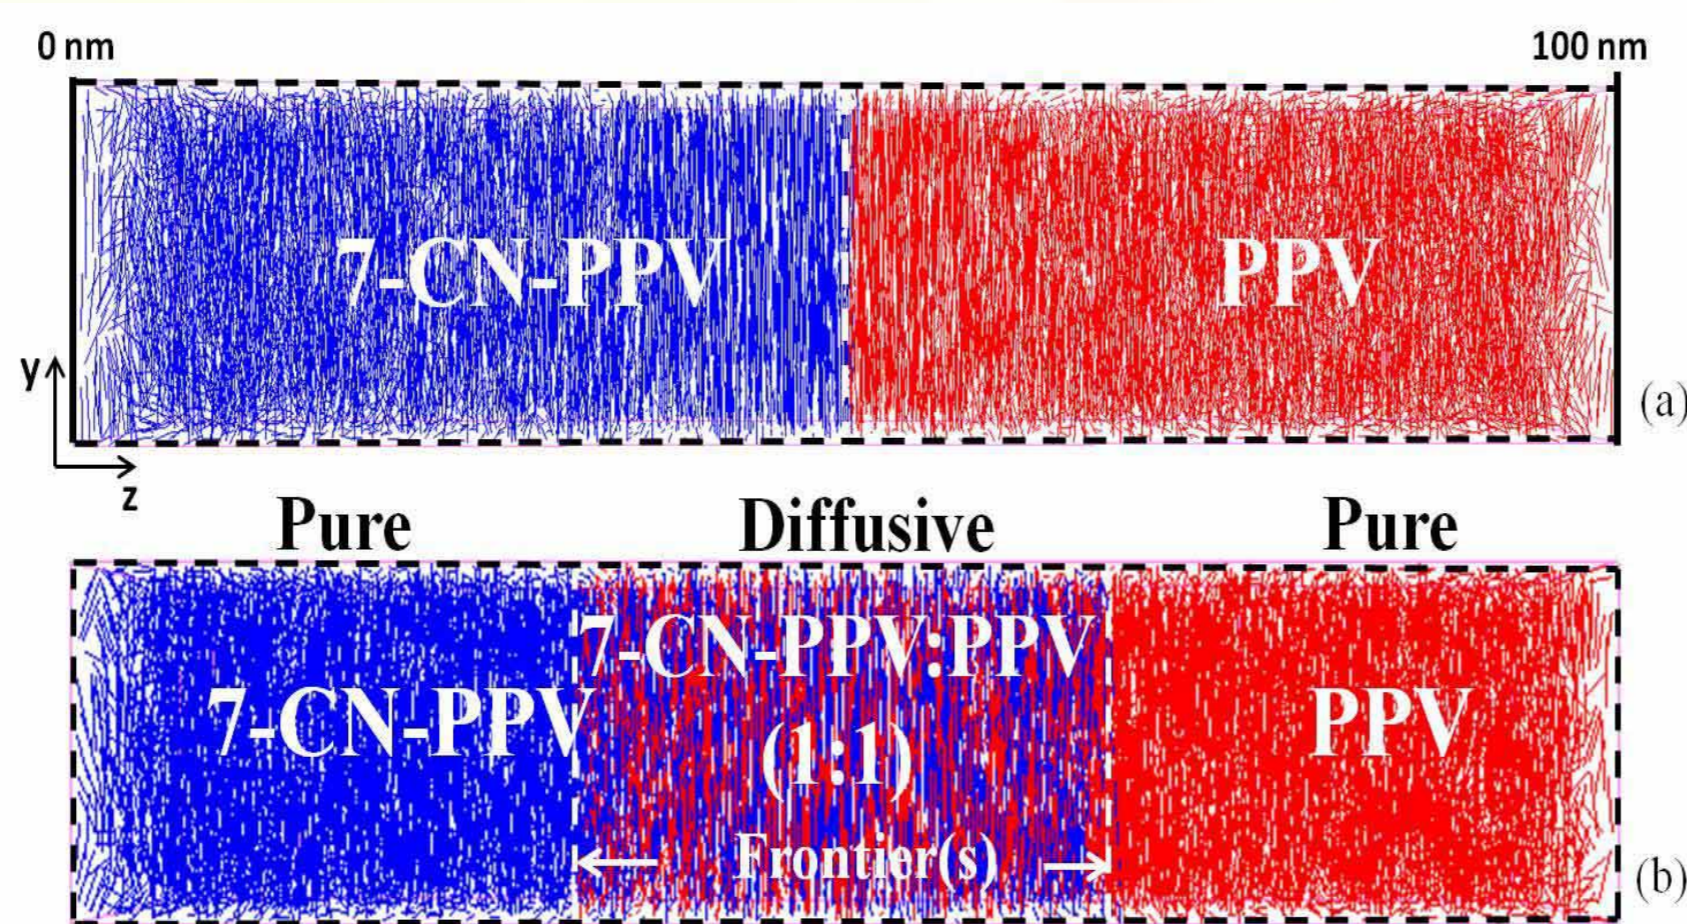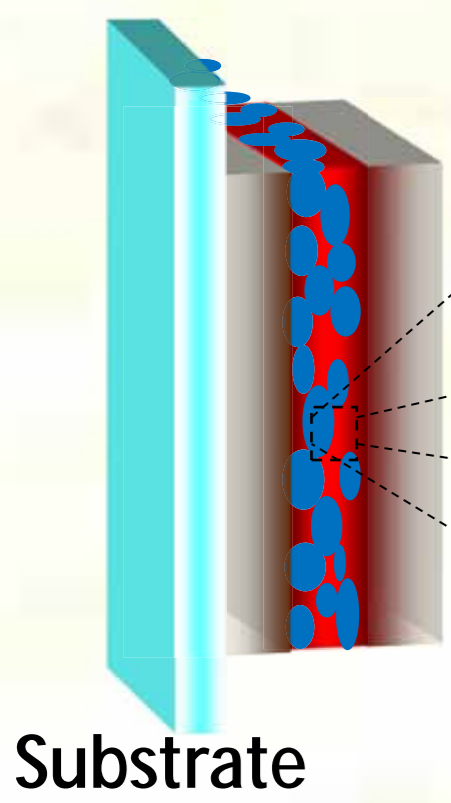

Optoelectronic Processes Considered


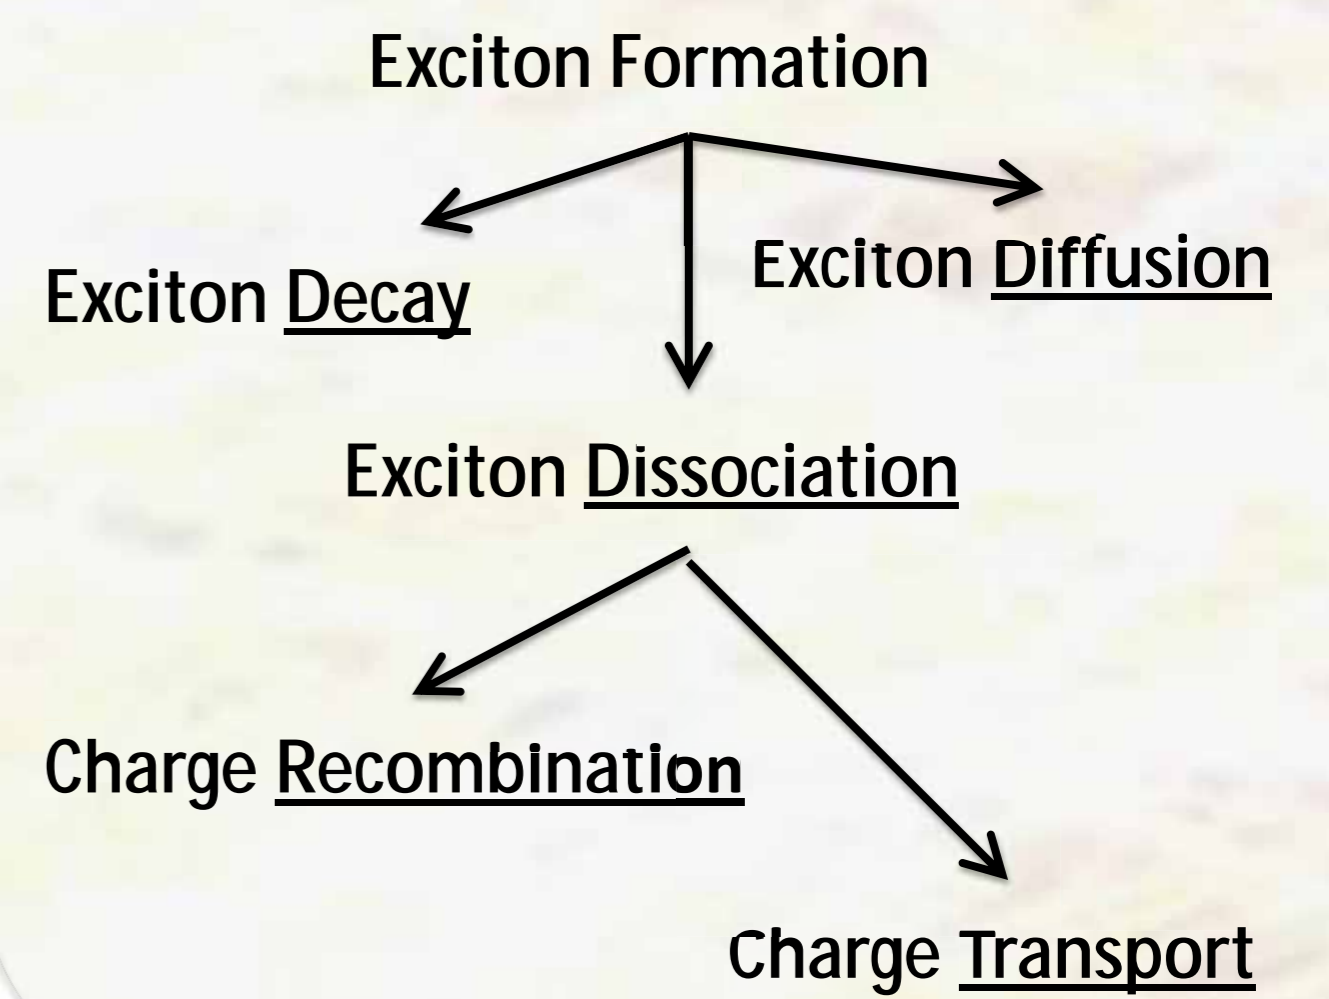


PHOTO code (based on a Monte Carlo method) was used to simulate exciton migration in bilayer polymer networks with different morphologies and diffusive interfaces width. A detailed description of the model can be found in Correia, HMG, et. al., Comput. Mater. Sci. 75 (2013) 18-23.

RESULTS AND CONCLUSION

- The presence of a diffusive interface leads to an increase on exciton quenching when compared to the sharp interface.
- The increase of the diffusive layer thickness increases exciton quenching due to an interpenetration of strands of both polymers, creating a mesh of donor-acceptor sites where excitons can easily dissociate.
- The increase of exciton dissociation is followed by an increase of charge recombination, and the difference between these two leads to a small yield of charge generation at the polymer-polymer with a maximum for a diffusive layer width of 8 nm.

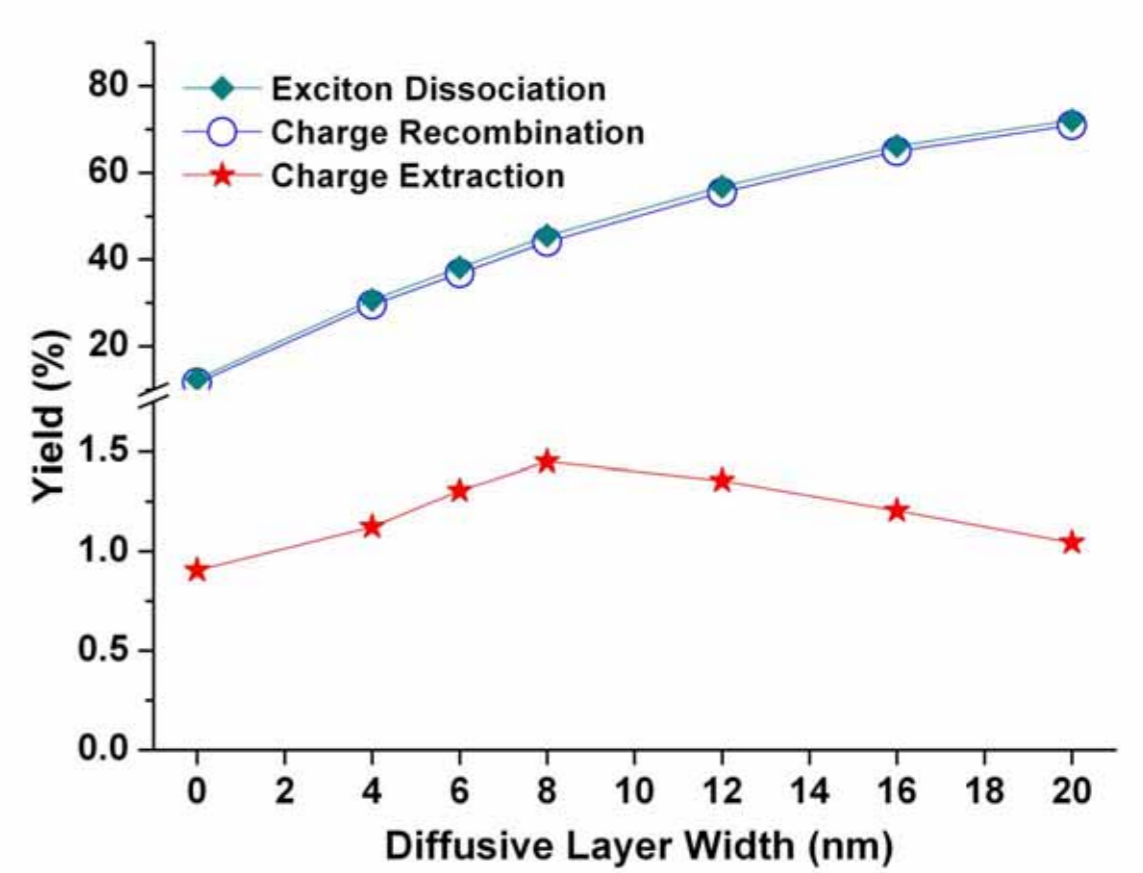

Diffusive Layer Thickness	Pristine Layers				Diffusive Layer				Pristine/Diffusive Interfaces			
	Exc.	Dec.	Diss.	Rec.	Exc.	Dec.	Diss.	Rec.	Exc.	Dec.	Diss.	Rec.
0	94.36	87.37	0.03	6.47	0.00	0.00	0.00	0.00	5.64	0.01	12.37	4.96
4	79.31	69.16	0.00	5.22	10.20	0.00	14.40	14.52	10.49	0.03	16.18	9.74
6	71.30	61.66	0.00	5.18	19.31	0.00	21.74	22.45	9.39	0.05	16.37	9.20
8	63.89	54.37	0.03	5.28	27.34	0.01	30.27	30.60	8.77	0.00	15.15	8.13
12	50.80	43.08	0.00	4.13	41.40	0.02	44.38	44.10	7.80	0.00	12.37	7.18
16	40.08	33.73	0.00	3.54	52.80	0.06	55.38	55.22	7.12	0.00	10.71	6.11
20	32.74	27.45	0.00	2.92	61.64	0.26	62.88	62.85	5.62	0.21	9.09	5.11

- For all diffusive layer thicknesses, the large majority of the excitons created within the diffusive layer and within the pristine/diffusive interface dissociate.
- Part of the excitons dissociated in diffusive regions are created on the neighbour regions.
- Almost all excitons dissociated within the diffusive layer recombine.
- The charge generation at the interface is much higher than the charge collected at the electrodes due to the large amount of recombination taking place within the pristine layers near those interfaces.