

Available online at www.sciencedirect.com

ScienceDirect

journal homepage: www.elsevier.com/locate/ijhydene

On the independence of hydrogen production from methanogenic suppressor in olive mill wastewater



M.R. Gonçalves, J.C. Costa, M.A. Pereira, A.A. Abreu*, M.M. Alves

Institute for Biotechnology and Bioengineering, Centre of Biological Engineering, University of Minho, 4710-057 Braga, Portugal

ARTICLE INFO

Article history:

Received 20 August 2013

Received in revised form

18 November 2013

Accepted 9 February 2014

Available online 11 March 2014

Keywords:

Biohydrogen

Biomethane

Homoacetogenesis

Olive oil mill effluent

Methanogenic suppressor

Anaerobic digestion

ABSTRACT

Anaerobic degradation of olive mill wastewater (OMW) at concentrations ranging from 2 to 100 g/L of chemical oxygen demand (COD) was assessed in batch assays. Methane was the main final product obtained for the lower concentrations tested. For 25 g COD/L, H₂ was temporarily produced, albeit H₂ depletion occurred, likely due to homoacetogenesis, since acetate was formed concomitantly. Hydrogen was produced and accumulated permanently in the assays containing 50 g COD/L of OMW. Methanogenesis and homoacetogenesis were naturally inhibited, suggesting that hydrogen recovery from OMW can be performed without the addition of methanogenic suppressors such as 2-bromoethanesulfonate. This fact opens new perspectives for the utilization of high OMW concentrations in a two-stage valorisation process combining biohydrogen and biomethane production.

Copyright © 2014, Hydrogen Energy Publications, LLC. Published by Elsevier Ltd. All rights reserved.

1. Introduction

Olive mill wastewater (OMW) is a complex effluent obtained from the traditional press and the continuous three-phase mills of olive oil production. Large amounts of OMW are generated every year and yet there are no feasible solutions to its treatment [1]. The production of biofuels (methane or hydrogen) from OMW is a promising solution for the treatment and valorisation of this pollutant [2]. However, there are still some problems associated with both processes.

Anaerobic digestion of raw OMW has been reported as a difficult process mainly due to their intrinsic characteristics, such as acid pH, high organic loads and the presence of complex and toxic compounds (lipids and phenolic

compounds) [1]. Anaerobic batch experiments have shown that high concentrations of OMW, such as 50 g/L chemical oxygen demand (COD), may lead to the inhibition of the microbial consortium [3]. The high concentration of raw OMW (130 g COD/L) has led researchers to use highly diluted streams (5 g COD/L) during the start-up of continuous anaerobic reactors, whereas 45–50 g COD/L of OMW was only used after one year of operation [4].

Hydrogen production from OMW has been performed by dark and photofermentation [5–8]. One of the main issues concerning hydrogen production through anaerobic processes is to assure that hydrogen-consuming microorganisms' are inhibited, and the activity of hydrogen-producing microorganisms is preserved and stimulated. Under anaerobic conditions, hydrogen is used mainly by hydrogenotrophic

* Corresponding author. Tel.: +351 253604400; fax: +351 253604429.

E-mail addresses: angela_abreu@deb.uminho.pt, abreu.angela@gmail.com (A.A. Abreu).

<http://dx.doi.org/10.1016/j.ijhydene.2014.02.056>

0360-3199/Copyright © 2014, Hydrogen Energy Publications, LLC. Published by Elsevier Ltd. All rights reserved.

methanogens to produce methane and by homoacetogenic bacteria to produce acetate [9]. Sludge pre-treatment with heat [10,11] and the addition of chemicals such as 2-bromoethanesulfonate (BES) [12,13] and chloroform [14] have been used to inhibit H_2 utilizers during the anaerobic degradation of wastewaters such as OMW and palm oil mill effluent. Alternatively, pure cultures have been used to produce hydrogen from these types of effluents [15]. Nevertheless, these strategies increase the overall cost of the process. In addition, chemical and heat treatments have usually a short time effect on methanogenesis and are not effective to prevent homoacetogenesis [16,17]. So far, there are no studies correlating OMW concentration with hydrogen production without applying strategies to inhibit H_2 utilizers.

Preliminary studies carried out in our research group (not published) suggested that hydrogen is selectively produced at high OMW concentration, in detriment of methane, without the need of applying strategies to inhibit H_2 utilizers. In this vein, the main objective of this work is to get more insights on the influence of OMW concentration on biohydrogen production and on the requirement of a methanogenic inhibitor.

2. Material and methods

Anaerobic batch experiments were carried out at different initial OMW concentrations, ranging from 2 to 100 g chemical oxygen demand per liter (COD/L), in the presence and absence of a methanogenic suppressor 2-bromoethane sulfonate (BES) – an analogue of coenzyme M in methanogens and inhibitor of methane-producing *Archaea*. These experiments were performed to evaluate the influence of the substrate concentration on H_2 and CH_4 production and to assess the need of a methanogenic inhibitor to promote H_2 production.

2.1. Inoculum and substrate

The anaerobic suspended sludge used in the batch experiments was obtained from a domestic wastewater treatment plant. The specific methanogenic activity of the sludge was <0.05 and 0.26 ± 0.01 g COD- CH_4 (STP) $gVS^{-1} d^{-1}$ for acetate and H_2/CO_2 (80/20 v/v), respectively. The OMW was obtained from a three-phase continuous olive oil extraction process (Amarante, Portugal) and stored at -20 °C for further utilization. OMW was characterized and the values obtained are summarized in Table 1.

2.2. Experiment set-up

Batch assays were performed in closed vials with volumes of 70 and 160 mL. The working volume was 20 mL. The sludge was added to the vials at a final concentration of around 3 g volatile suspended solids per liter (VSS/L). The basal medium used in all batch experiments was made up with demineralised water and sodium bicarbonate (3 g/L) and the pH was adjusted to 7.0. The OMW, previously adjusted to pH 7.0, was diluted at different final concentrations of 2, 10, 25, 50, and 100 g COD/L. The vials were flushed with N_2/CO_2 (80:20 v/v) and finally the medium was reduced with

Table 1 – Olive mill wastewater (OMW) characterization.

Parameter	OMW ^a
pH	4.7 ± 0.1
Total COD (g/L)	130.1 ± 7.4
Total Solids (g/L)	75.5 ± 3.1
Total Nitrogen (mg/L)	460.0 ± 53.2
Total Phenols (Gallic acid, g/L)	4.3 ± 0.4
Oil and Grease (g/L)	13.6 ± 1.5
Total free-long chain fatty acids (g COD/L)	6.2 ± 3.8
% C18:1	78.1 ± 10.9

^a Data expressed as an average ± error (95% confidence).

$Na_2S \cdot 9H_2O$ at final concentration of 1 mM. The batch experiments were performed in the presence (15 mM) and absence of BES. The vials were placed on a rotary shaker (100 rpm) and incubated at 37 °C. The batch experiments performed with OMW concentrations of 2, 10 and 25 g COD/L were done in duplicate. pH, methane and hydrogen were determined along the experiment time. For the batch assay containing 25 g COD/L, volatile fatty acids (VFAs) were also analysed. Batch experiments with 50 and 100 g COD/L of OMW were carried out in quadruplicate, since the results variability is high for these substrate concentrations. In this case, VFAs and pH were only measured at the end of the experiment. Methane and hydrogen accumulated in the vials headspace were measured along the experiments. The measured values of each gas were corrected to standard temperature and pressure (STP) conditions. The amount of methane produced was converted to equivalent COD (mg COD- CH_4), considering the theoretical biochemical methane potential (350 L CH_4 kg^{-1} COD).

2.3. Analytical methods

Total chemical oxygen demand (COD), total solids (TS), total phenols and biogas were determined as described in previous studies [3,4]. VFAs analysis has been described previously [18].

3. Results and discussion

The initial production of hydrogen and methane from OMW at concentrations ranging from 2 to 100 g COD/L, in the presence and absence of a methanogenic inhibitor (BES), is represented in Fig. 1.

In BES-free vials, the highest methane production (49 mg COD- CH_4) was achieved with 2 g COD/L of OMW (Fig. 1(a)) in 19 days, representing a biodegradability of 81%. Lower methanisation was obtained for OMW concentrations of 10 and 25 g COD/L, in a similar time range, and no methane production was observed in batch experiments with 50 and 100 g COD/L. A lag-phase of 7 days was observed in the batch experiment performed with 25 g COD/L.

Regarding hydrogen production (Fig. 1(b)), the accumulation of H_2 was only verified in batch experiments with 50 g COD/L. A production of 0.53 mmol H_2 was attained after 3 days and it was practically stable until the end of experiment (32 days). After day 1, 0.3 mmol of hydrogen was produced, with

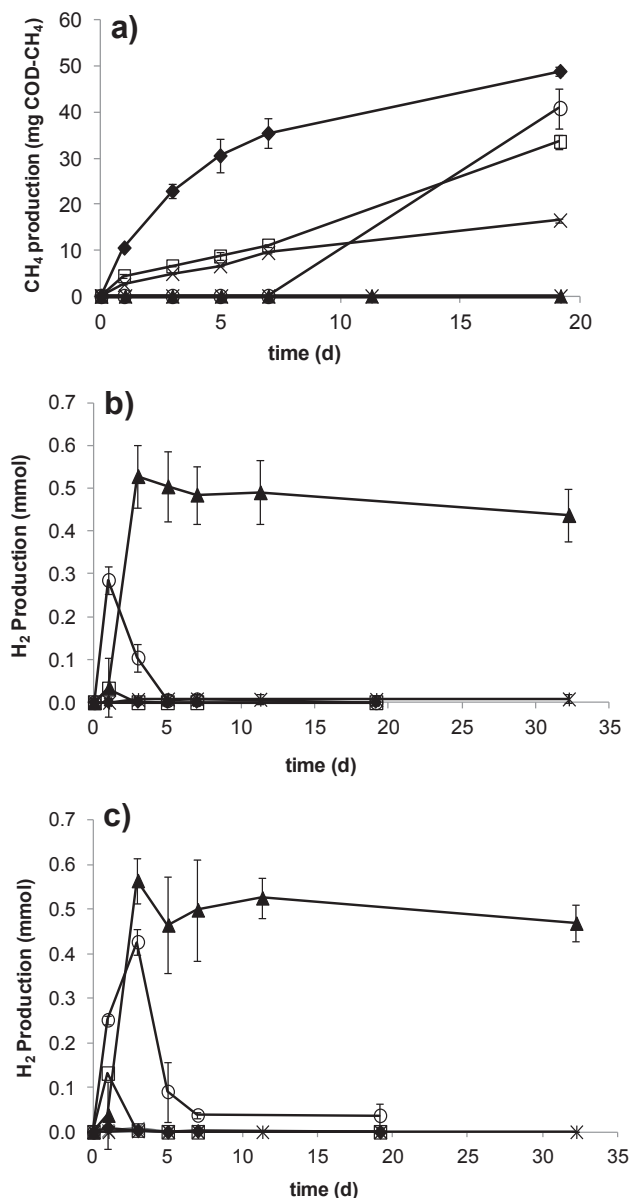


Fig. 1 – Methane (a) and hydrogen (b) production in BES-free vials and hydrogen production in the presence of BES (c) at different OMW concentrations. fx1 blank; fx2 2 g COD/L; fx3 10 g COD/L; fx4 25 g COD/L; fx5 50 g COD/L; fx6 100 g COD/L.

25 g COD/L OMW. However, hydrogen depletion occurred afterwards and at day 5 was already absent (Fig. 1(b)). Hydrogen was detected at residual concentrations in the batch experiments performed with 100 g COD/L.

In the presence of BES, as expected, methane was not detected at any OMW concentration. This compound inhibits methanogenic activity [11], promoting H₂ formation. In the present study, the presence of BES did not improve significantly the hydrogen production from OMW. Hydrogen production values obtained with and without BES were similar (Fig. 1(b) and (c)). The main difference was verified at 25 g COD/L, in which a higher H₂ production was attained (0.4 mmol). Nevertheless, the hydrogen content decreased afterwards, similarly to the BES-free trials.

Although methanogenesis was observed in BES free-vials with substrate concentrations of 2, 10 and 25 g COD/L, methane was not produced for substrate concentrations equal or higher than 50 g COD/L. These results corroborate previous findings wherein methane production was inhibited in the presence of 50 g COD-OMW L⁻¹, even using an acclimated sludge [3]. In the present work, it was disclosed that hydrogen is selectively produced at high OMW concentrations (25 and 50 g COD/L), independently of the BES presence. Moreover, at an OMW concentration of 50 g COD/L, hydrogen consumption by both homoacetogenic bacteria and hydrogenotrophic methanogens was blocked, which is a new finding that opens the possibility of using OMW for direct H₂ production.

The results obtained with 25 g COD/L in the presence of BES suggested that H₂ was depleted by homoacetogenic bacteria, since methanogenic archaea were inhibited (methane was not detected).

The VFAs and pH were determined along the batch experiments performed with 25 g COD/L in order to explore this hypothesis. Independently of the presence of a methanogenic suppressor, hydrogen and acetate were the main intermediates initially detected (Fig. 2(a) and (b)). After this initial phase, hydrogen was rapidly consumed and acetate concentration rose up to a maximum of 1.52 and 1.03 g/L at day 5, in the absence and in the presence of BES, respectively. In a subsequent phase, acetate depletion accompanied by methane production was observed for the BES-free vials (Fig. 2(a)) whereas in the assays with BES acetate accumulated consistently (Fig. 2(b)). Besides acetate, butyrate was the main VFA produced, reaching a maximum of 1.36 g/L and 1.16 g/L, in the absence and in the presence of BES, correspondingly. At the end of the experiment, propionate was also present with concentrations of 0.33 and 0.30 g/L (Fig. 2(c) and (d)).

Acetogenesis only proceeds at low hydrogen partial pressures to favour the thermodynamics of the reactions [19]. In this study, acetate was consumed (acetoclastic methanogenesis) only after hydrogen depletion. Moreover, during the depletion of hydrogen, methane was not detected and acetate was formed concomitantly, indicating that hydrogenotrophic methanogenesis was unfavourable compared to homoacetogenesis. Xu et al. [10] reported that homoacetogenesis was stimulated under suppressed methanogenesis (with BES) during the mesophilic anaerobic digestion of sludge. Luo et al. [17] also reported higher homoacetogenic activity when methanogenesis was fully inhibited under mesophilic conditions. The results obtained in the present work sustain the hypothesis that homoacetogenesis can be the main pathway for H₂ depletion, in a mesophilic anaerobic consortium treating OMW, even when methanogenesis was not suppressed by BES. The inhibition of hydrogenotrophic methanogens can be due to a drop in pH (<6.0) or to the presence of toxic compounds [20]. However, in this case pH was always equal or above 6.0. The presence of toxic compounds in olive mill wastewaters is well described, being emphasized the lipidic and phenolic compounds as the main toxic and/or recalcitrants [21,22].

Hydrogen was considerably produced and accumulated in batch experiments with OMW concentration of 50 g COD/L. Soluble fermentation products and hydrogen partial pressure were determined at the end of the experiments (Table 2). It

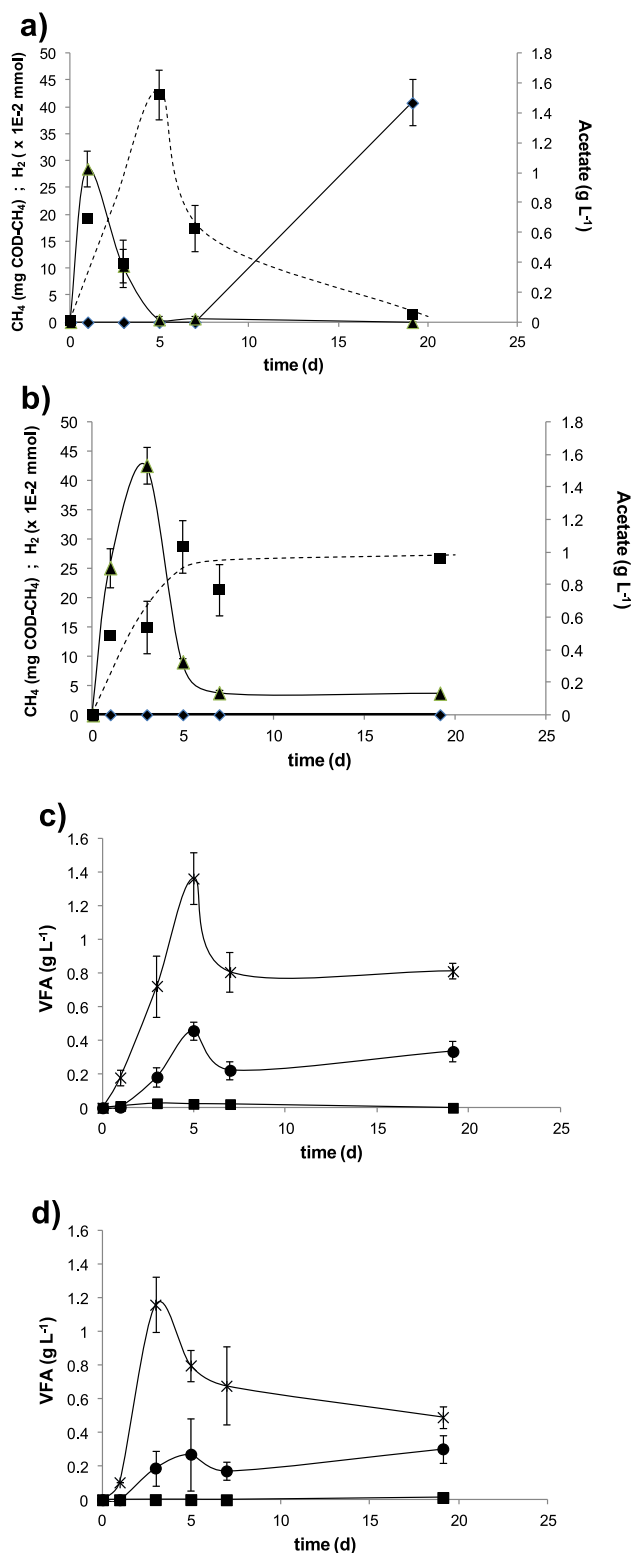


Fig. 2 – Acetate (g/L), methane (mg COD-CH₄), hydrogen (×1E-2 mmol) and volatile fatty acids (VFA, g/L) production throughout the batch experiment with 25 g COD-OMW L⁻¹, in the absence (a, c) and in the presence (b, d) of BES. fx7 Acetate; fx5 H₂; fx2 CH₄; fx1 n-Butyrate; fx8 Propionate fx9 i-Butyrate.

was observed that pH was around 5, acetate and butyrate were the main VFAs present and hydrogen partial pressure achieved values in the range of 8000–8500 Pa. No significant differences, in terms of VFA, pH, and hydrogen production were found between the batch experiments with and without BES.

High VFA concentration, low pH and high hydrogen partial pressure are the most likely causes for the inhibition of the anaerobic process. Methanogenesis is inhibited at acidic conditions and, consequently, acetate and hydrogen accumulate in the medium. Furthermore, the anaerobic oxidation of acetate (acetogenesis) only proceeds at low hydrogen partial pressures to favour the thermodynamics of the reactions. Hydrogen partial pressure must be below 10 Pa (10⁻⁴ atm) for fatty acid degradation to proceed [22].

The high hydrogen partial pressure observed in the assays with 50 g COD/L was possibly blocking the degradation of fatty acids. Consequently, acetate and butyrate accumulated, reaching 1.1 and 1.3–1.6 g/L, respectively. Moreover, acetate accumulation can affect the degradation of butyrate and consequently the pH, as referred by Ahring and Westermann [23]. These authors concluded that the accumulation of hydrogen and acetate can inhibit the activity of the acetogenic bacteria that degrade butyrate in syntrophic association with methanogens. They found that increasing hydrogen partial pressure from 100 to 2030 Pa and acetate concentration from 16.4 to 81.4 mM, gradually inhibited butyrate consumption. Siriwongrungron et al. [16] concluded that the reaction of butyrate to acetate and hydrogen under suppressed methanogenic conditions was possible when hydrogen partial pressure was kept at low values.

One of the main concerns in biohydrogen production from wastes is that the activity of hydrogen consuming microorganisms, like methanogenic archaea and homoacetogenic bacteria, must be suppressed. In this study, a concentration of OMW 50 g COD/L was *per se* inhibitory for methanogenesis and homoacetogenesis, and the activity of hydrogen-producing microorganisms was preserved. The remaining organic matter can be used in a second stage to produce methane which would improve the treatment and the energetic valorization of OMW. This two-stage approach has a potential near-term practical application in the production of biogas enriched with hydrogen. Actually, a mixture of 5–15% hydrogen in biogas has already been demonstrated to work in internal combustion engines [24]. This hydrogen rich source of biofuel can significantly reduce the emission of CO, CO₂ and NO_x.

Table 2 – Volatile fatty acids (VFA), pH and hydrogen partial pressure measured at the end of the BES-free and BES containing batch experiments with 50 g COD/L of OMW.

Parameter		BES-free	BES
VFA (g/L)	Acetate	1.13 ± 0.09	1.06 ± 0.25
	Propionate	0.0 ± 0.0	0.0 ± 0.0
	i-Butyrate	0.0 ± 0.0	0.0 ± 0.0
	n-Butyrate	1.56 ± 0.06	1.30 ± 0.28
pH		4.9 ± 0.1	5.0 ± 0.1
H ₂ Partial Pressure (Pa)		8.0E3	8.5E3
Average ± standard deviation; n = 4.			

At high OMW concentrations such as, 100 g COD/L the inhibition is extended to most of the microbial consortium, probably due to the high concentration of complex compounds (lipids and phenolic).

4. Conclusions

This study demonstrated that OMW biodegradation to methane and hydrogen, in batch experiments, was determined by its concentration. Hydrogen was consistently produced at OMW concentrations of 50 g COD/L and methane was produced for concentration in the range of 2–25 g COD/L. In the present study, methanogenesis and homoacetogenesis were naturally inhibited at OMW concentration ≥ 50 g COD/L. It was possible to recover hydrogen without addition of a synthetic methanogenesis and homoacetogenesis suppressor. However for OMW at 100 g COD/L neither hydrogen nor methane could be produced.

Acknowledgements

The authors thank the FCT Strategic Project PEst-OE/EQB/LA0023/2013, the FCT Project RECI/BBB-EBI/0179/2012, the Project “BioEnv – Biotechnology and Bioengineering for a sustainable world”, REF. NORTE-07-0124-FEDER-000048, co-funded by the Programa Operacional Regional do Norte (ON.2 – O Novo Norte), QREN, FEDER. Also through the project PTDC/ENR/69755/2006 and grants given to Marta Gonçalves SFRH/BD/40746/2007, José Carlos Costa SFRH/BDP/48962/2008 and Ângela A Abreu SFRH/BPD/82000/2011.

REFERENCES

- Niaounakis M, Havalidakis CP. Olive processing waste management. Literature review and patent survey. 2nd ed. Oxford: Elsevier; 2006.
- Frederici F, Fava F, Kalogerakis N, Mantzavinos D. Valorisation of agro-industrial by-products, effluents and waste: concept, opportunities and the case of olive mill wastewaters. *J Chem Technol Biotechnol* 2009;84(6):895–900.
- Rönnebro E. Development of group II borohydrides as hydrogen storage materials. *Curr Opin Solid State Mater Sci* 2011;15(2):44–51.
- (a) Gonçalves MR, Costa JC, Marques IP, Alves MM. Inoculum acclimation to oleate promotes the conversion of olive mill wastewater to methane. *Energy* 2011;36(4):2138–41; (b) Gonçalves MR, Costa JC, Marques IP, Alves MM. Strategies for lipids and phenolics degradation in the anaerobic treatment of olive mill wastewater. *Water Res* 15 April 2012;46(6):1684–92.
- Eroglu E, Eroglu I, Gunduz U, Turker L, Yucel M. Biological hydrogen production from olive mill wastewater with two-stage processes. *Int J Hydrogen Energy* 2006;31:1527–35.
- Eroglu E, Eroglu I, Gunduz U, Turker L, Yucel M. Treatment of olive mill wastewater by different physicochemical methods and utilization of their liquid effluents for biological hydrogen production. *Biomass Bioenergy* 2009;33:701–5.
- Eroglu E, Eroglu I, Gunduz U, Turker L, Yucel M. Comparison of physicochemical characteristics and photofermentative hydrogen production potential of wastewaters produced from different olive oil mills in Wester-Anatolia, Turkey. *Biomass Bioenergy* 2009;33:706–11.
- Ntaikou I, Kourmentza C, Koutrouli EC, Stamatelatou K, Zampraka A, Kornaros M, et al. Exploitation of olive oil mill wastewater for combined biohydrogen and biopolymers production. *Bioresour Technol* 2009;100:3724–30.
- Lovley DR, Klug MJ. Methanogenesis from methanol and methylamines and acetogenesis from hydrogen and carbon dioxide in the Sediments of A Eutrophic Lake. *Appl Environ Microbiol* 1983;45:1310–5.
- Mohan SV, Babu VL, Sarma PN. Effect of various pretreatment methods on anaerobic mixed microflora to enhance biohydrogen production utilizing dairy wastewater as substrate. *Bioresour Technol* 2008;99:59–67.
- Abreu AA, Alves JI, Pereira MA, Sousa DZ, Alves MM. Strategies to suppress hydrogen-consuming microorganisms affect macro and micro scale structure and microbiology of granular sludge. *Biotechnol Bioeng* 2011;108(8):1766–75.
- Xu K, Liu H, Chen J. Effect of classic methanogenic inhibitors on the quantity and diversity of archeal community and the reductive homoacetogenic activity during the process of anaerobic sludge digestion. *Bioresour Technol* 2010;101:2600–7.
- Zinder SH, Anguish T, Cardwell SC. Selective inhibition by 2-Bromoethanesulfonate of methanogenesis from acetate in a thermophilic anaerobic digester. *Appl Environ Microbiol* 1984;47(6):1343–5.
- Chidthaisong A, Conrad R. Specificity of chloroform, 2-bromoethanesulfonate and fluoroacetate to inhibit methanogenesis and other anaerobic processes in anoxic rice field soil. *Soil Biol Biochem* 2000;32:977–88.
- Chong M-L, Rahim RA, Shirai Y, Hassan MA. Biohydrogen production by *Clostridium butyricum* EB6 from palm oil mill effluent. *Int J Hydrogen Energy* 2009;34:764–71.
- Siriwongrungron V, Raymond Z, Angelidaki I. Homoacetogenesis as the alternative pathway for H₂ sink during thermophilic anaerobic degradation of butyrate under suppressed methanogenesis. *Water Res* 2007;41:4204–10.
- Luo G, Karakashev D, Xie L, Zhou Q, Angelidaki I. Long-term effect of inoculum pretreatment on fermentative hydrogen production by repeated batch cultivations: homoacetogenesis and methanogenesis as competitors to hydrogen production. *Biotechnol Bioeng* 2011;108(8):1816–27.
- Gonçalves MR, Freitas P, Marques IP. Bioenergy recovery from olive mill effluent in a hybrid reactor. *Biomass Bioenergy* April 2012;39:253–60.
- Schink B. Energetics of syntrophic cooperation in methanogenic degradation. *Microbiol Mol Biol Rev* 1997;61-2:262–80.
- Ahring BK, Westermann P, Mah RA. Hydrogen inhibition of acetate metabolism and kinetics of hydrogen consumption by *Methanosarcina thermophila* TM-1. *Arch Microbiol* 1991;157:38–42.
- Beccari M, Bonemazzi F, Majone M, Riccardi C. Interaction between acidogenesis and methanogenesis in the anaerobic treatment of olive oil mill effluents. *Water Res* 1996;30(1):183–9.
- Beccari M, Carucci G, Majone M, Torrisi L. Role of lipids and phenolic compounds in the anaerobic treatment of olive oil mill effluents. *Environ Technol* 1999;20(1):105–10.
- Ahring BK, Westermann P. Product inhibition of butyrate metabolism by acetate and hydrogen in a thermophilic coculture. *Appl Environ Microbiol* 1988;54(10):2393–7.
- Porpatham E, Ramesh A, Nagalingam B. Effect of hydrogen addition on the performance of a biogas fuelled spark ignition engine. *Int J Hydrogen Energy* 2007;32:2057–65.